


PRECIPITATION

Laser Precipitation Monitor

Part number: 5.4110.00.xxx

The acquisition comprises the types of precipitation, intensity and the spectrum. All measuring values are available for the user via an RS485/422 interface. In addition, the instrument is equipped with two further digital outputs (opto-couplers), which output, for ex., pulses and state of precipitation. The optical components are equipped with an integrated heating.

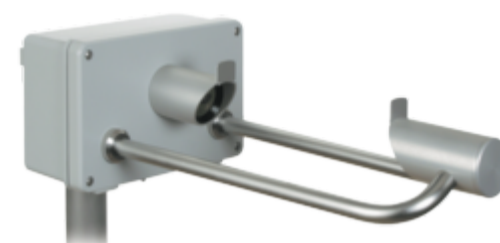

Specification

Part number: 5.4110.00.xxx

Precipitation	
Meas. principle	laser beam
Particle size	0.16 ... 8 mm
Particle speed	0.2 ... 20 m/s
Intensity	< 0.005 ... > 250 mm/h
Error intensity -/ quantity measurement	< 15 % @ rain 0.5 ... 20 mm/h < 30 % @ snow (WS < 3m/s)
Precipitation types	drizzle (also freezing) rain (also freezing) hail snow snow grains / ice needles soft hail / ice grains
Accuracy	comparing with synoptic observation drizzle > 97% rain > 99% hail > 95% snow > 99% snow grains > 60%
Sensors	
Laser diode	786 nm, max. 0.5 mW
Laser class	1M (EN60825-1:1994 A2:2001)
Data output digital	
Interface	RS485 / 422, potential isolation and 2 impulse outputs, potential isolation
Baudrate	1200 ... 115200 Baud
Output type	ASCII, Synop, Metar @ RS485 / 422 frequency @ impulse outputs
Resolution intensity	0.001 mm/h @ RS485 / 422
Resolution quantity	0,001 mm @ RS485 / 422 0.1 mm, 0,01 mm, 0,005 mm @ impulse outputs
General	

Ambient temp.	-40 ... +70 °C
Protection	IP 65
Dimension	Ø 270 x 170 x 540 mm
Weight	4.8 kg

Versions

As per 5.4110.00.xxx, but:

Product number 5.4110.00.000

General	
Power supply	24 V AC/DC or 22 ... 30 V DC, < 750 mA

Product number 5.4110.00.100

General	
Power supply	115 V AC, 15 W


Product number 5.4110.00.200


General	
Power supply	230 V AC, 15 W

Product number 5.4110.00.300

General	
Power supply	24 VDC, 600 mA

Accessories

Product	Product name	Brief description	
	Instrument Support 4.3187.61.x00	For the vibration-reduced operation of the LPM on an available concrete foundation, provided by the customer.	
		General	
		Material	steel, zinc plated
		Tube diameter	Ø 60 mm
		Mounting distance	424 mm
		Dimension	645 x 645 mm
		Weight	30 kg



**Wind Protection
Element**
5.4200.00.000

Serves as optional accessory for uninterrupted acquisition even in case of wind.

Material	
Frame	stell, zinc plated
Laminations	stainless steel
General	
Dimension	600 x 480 x 400 mm
Weight	18 kg
Fixing boring	Ø 48 ... 102 mm

