



HD37AB1347 INDOOR AIR QUALITY MONITOR

HD37AB1347 IAQ Monitor is a tool manufactured by Delta Ohm for the analysis of air quality (INDOOR AIR QUALITY, IAQ).

The instrument simultaneously measures several parameters: **Carbon Dioxide CO₂**, **Carbon monoxide CO**, **Temperature**, **Relative humidity** and calculates **Dew Point**, **wet bulb temperature**, **absolute humidity**, **mixing ratio**, **enthalpy** and **atmospheric pressure**. All this with the **P37AB147** SICRAM probe. The probe SICRAM **P37B147** does not measure the Carbon Monoxide CO. Also combined **temperature and humidity** SICRAM probes, **Hot wire Air speed** SICRAM probes, **Vane air speed** SICRAM probes and **temperature** SICRAM probes can be connected to the instrument.

The instrument, with proper procedure, calculates the percentage of outdoor air intake (**% Outside Air**) as a function of both carbon dioxide CO₂ and temperature and the **Ventilation Rate**.

HD37AB1347 data logger has a storage capacity of 67,600 presets for each of the two inputs divided into 64 blocks. Use the software DeltaLog10 version 0.1.5.0.

The instrument is equipped with a large dot matrix graphic display with a resolution of 160x160 points. Standards: **ASHRAE 62.1-2004**, **Decree Law 81/2008**. The rules apply to all enclosed spaces that may be occupied by people. Should be considered, depending on air quality, chemical contaminants, physical and biological or outdoor air flow inside inadequately purified (Ventilation Rate).

Typical applications of the instrument with the range of sensors mentioned above are:

- Measure IAQ and comfort conditions in schools, offices and indoor.
- Analysis and study of sick building syndrome (Sick Building Syndrome) and consequences.
- Verification of HVAC system.
- Investigation of IAQ conditions in factories to optimize the microclimate and improve productivity.
- Audits in Building Automation.

===== Model HD37AB1347 IAQ =====	Instrument model
Firm.Ver.=01.00	Instrument firmware version
Firm.Date=2010/01/15	Instrument firmware date
SN=12345678	Instrument serial number
ID=0000000000000000	Identification Code

Probe ch.1 description	Description of the probe connected to input 1
Type: CO2-CO Fw.VOR0	
Data cal.:2010/01/15	
Serial N.:10010060	

Probe ch.2 description	Description of the probe connected to input 2
Type: Hot wire	
Data cal.:2010/01/15	
Serial N.: 10010100	

Date=2010/01/15 15:00:00	Date and time
CO2 850 ppm	Carbon Dioxide
CO 0 ppm	Carbon Monoxide
RH 39.1 %	Relative Humidity
T1 22.0 °C	Temperature
Patm 1010 hPa	Atmospheric Pressure
Va 0.00 m/s	Air Speed
=====	

HD37AB1347 Technical specifications

Instrument

Dimensions (Length x Width x Height)	185x90x40 mm
Weight	470 g (batteries included)
Materials	ABS, rubber
Display	Backlit, Dot Matrix 160x160 dots, visible area 52x42 mm

Operating conditions

Operating temperature	-5...50°C
Storage temperature	-25...65°C
Working relative humidity	0 ... 85% RH without condensation

Protection degree

IP66	
Instrument uncertainty	± 1 digit @ 20°C

Power supply

Mains adapter (code SWD10)	12Vdc/1A
Rechargeable batteries	4 1.2V type AA batteries Ni-MH
Autonomy	20 hours with 2200mAh Ni-MH batteries (with P37AB147 probe connected)
Power absorbed with instrument off	< 45µA
Security of stored data	Unlimited

Connections

Input for probes with SICRAM module	Two 8-pole male DIN45326 connectors
You can connect the following probes to the Indoor Air Quality input:	- P37AB147 - P37B147 - Temperature probes equipped with SICRAM module - Temperature and Humidity combined probes with SICRAM module

You can connect the following probes to the **Temp - Air Velocity** input:

- **Hot-Wire Sensor Air Speed** probes with SICRAM module
- **Vane Air Speed** probes with SICRAM module
- **Temperature** probes equipped with SICRAM module

Serial interface:

Socket:	8-pole M12
Type:	RS232C (EIA/TIA574) or USB 1.1 or 2.0 not insulated
Baud rate:	Between 1200 and 38400 baud. With USB baud=460800
Data bits:	8
Parity:	None
Stop bits:	1
Flow control:	Xon-Xoff
Cable length:	Max 15 m

Memory Divided into 64 blocks.
Storage capacity 67600 recordings per each of the 2 inputs.
Logging interval Selectable among: 15, 30 seconds, 1, 2, 5, 10, 15, 20, 30 minutes and 1 hour.

Logging interval	Storage capacity	Logging interval	Storage capacity
15 seconds	About 11 days and 17 hours	10 minutes	About 1 year and 104 days
30 seconds	About 23 days and 11 hours	15 minutes	About 1 year and 339 days
1 minute	About 46 days and 22 hours	20 minutes	About 2 years and 208 days
2 minutes	About 93 days and 21 hours	30 minutes	About 3 years and 313 days
5 minutes	About 234 days and 17 hours	1 hour	About 7 years and 261 days

Technical specifications of the probes that can be connected to the HD37AB1347 instrument

P37AB147 and P37B147 SICRAM probes

- **P37AB147:** Measurement of CO₂ – CO – Relative Humidity – Temperature – Atmospheric Pressure.
 - **P37B147:** Measurement of CO₂ – Relative Humidity – Temperature – Atmospheric Pressure.

CO₂ Carbon Dioxide

Sensor NDIR Dual Wavelength
 Measurement range 0 ... 5000ppm
 Sensor working range -5 ... 50°C
 Accuracy ±50ppm+3% of measurement
 Resolution 1ppm
 Temperature dependence 0.1%f.s./°C
 Response time (T₉₀) < 120 sec (air speed = 2m/sec)
 Long-term stability 5% of measurement/5 years

CO Carbon Monoxide (only P37AB147)

Sensor Electrochemical cell
 Measurement range 0 ... 500ppm
 Sensor working range -5 ... 50°C
 Accuracy ±3ppm+3% of measurement
 Resolution 1ppm
 Response time (T₉₀) < 50 sec
 Long-term stability 5% of measurement/year
 Service life > 5 years in normal environment conditions

Relative Humidity RH

Type of sensor Capacitive
 Sensor protection Stainless steel grid filter (on request 20µm sintered filter P6 in AISI 316 or 10µm sintered filter P7 in PTFE)
 Measurement range 0 ... 100 % RH
 Sensor working range -20 ... +60°C
 Accuracy ±2% (10÷90% RH) ±2.5% in the remaining range
 Resolution 0.1°C
 Temperature dependence ±2% on all temperature range
 Hysteresis and repeatability 1% RH
 Response time (T₉₀) < 20 sec (air speed = 2m/sec) without filter
 Long-term stability 1%/year

Temperature T

Type of sensor NTC 10kΩ
 Measurement range -20 ... +60°C
 Accuracy ±0.2°C ±0.15% of measurement
 Resolution 0.1°C
 Response time (T₉₀) < 30 sec (air speed = 2m/sec)
 Long-term stability 0.1°C/year

Atmospheric Pressure Patm

Type of sensor Piezo-resistive
 Measurement range 750 ... 1100 hPa
 Accuracy ±1.5 hPa @ 25°C
 Resolution 1 hPa
 Long-term stability 2hPa/year
 Temperature drift ±3hPa with temperature -20 ... +60°C

Relative humidity and temperature probes using SICRAM module

Model	Temp. sensor	Application range		Accuracy	
		%RH	Temperature	%RH	Temp.
HP472ACR	Pt100	0...100%RH	-20°C...+80°C	±1.5%RH (10...90% RH) ±2.5%RH remaining range	±0.3°C
HP473ACR	Pt100	0...100%RH	-20°C...+80°C		±0.3°C
HP474ACR	Pt100	0...100%RH	-40°C...+150°C	±2.5% (10...95% RH) ±3.5% remaining range	±0.3°C
HP475ACR	Pt100	0...100%RH	-40°C...+150°C		±0.3°C
HP475AC1R	Pt100	0...100%RH	-40°C...+150°C		±0.3°C
HP477DCR	Pt100	0...100%RH	-40°C...+150°C		±0.3°C
HP478ACR	Pt100	0...100%RH	-40°C...+150°C		±0.3°C

Common characteristics

Relative Humidity

Sensor Capacitive
 Typical capacity @30%RH 300pF±40pF
 Sensor operating temperature -20 ... 80°C
 Measurement range 0÷100%RH
 Uncertainty ±1.5% RH (10...90% RH) ±2.5% RH in the remaining range
 Resolution 0.1%RH
 Temperature drift @20°C 0.02%RH/°C
 Response time %RH 10sec (10÷80% RH; air speed=2m/s) at constant temperature

Temperature with sensor Pt100

Resolution 0.1°C
 Temperature drift @20°C 0.003%/°C



Air Quality - CO - CO₂

Hot-Wire Air Speed measurement probes with SICRAM module: AP471 S1 - AP471 S2 - AP471 S3 - AP471 S4

	AP471 S1 - AP471 S3	AP471 S2	AP471 S4
Type of measurements	Air speed, calculated flow rate, air temperature		
Type of sensor			
Speed	NTC thermistor	Omni directional NTC thermistor	
Temperature	NTC thermistor		
Measurement range			
Speed	0.1 ... 40m/s		0.1 ... 5m/s
Temperature	-25 ... +80°C	-25 ... +80°C	0 ... 80°C
Measurement resolution			
Speed	0.01 m/s 0.1 km/h 1 ft/min 0.1 mph 0.1 knot		
Temperature	0.1°C		
Measurement accuracy			
Speed	±0.1 m/s (0...0.99 m/s)	±0.05m/s (0...0.99 m/s)	
	±0.3 m/s (1.00...9.99 m/s)	±0.15m/s (1.00...5.00 m/s)	
	±0.8 m/s (10.00...40.0 m/s)		
Temperature	±0.8°C (-10...+80°C)		
Minimum speed	0.1 m/s		
Air temperature compensation	0...80°C		
Sensor working conditions	Clean air, RH<80 %		
Battery life	Approx. 20 hours @ 20 m/s with alkaline batteries	Approx. 30 hours @ 5 m/s with alkaline batteries	
Unit of measurement			
Speed	m/s – km/h – ft/min – mph – knot		
Flow rate	l/s - m³/s - m³/min - m³/h - ft³/s - ft³/min		
Pipeline section for flow rate calculation	0.0001...1.9999 m²		
Cable length	~2m		

Vane Air Speed measurement probes with SICRAM module: AP472 S1... - AP472 S2 - AP472 S4...

	AP472 S1	AP472 S2	AP472 S4...			
			L	LT	H	HT
Type of measurements	Air speed, calculated flow rate, air temperature	Air speed, calculated flow rate	Air speed, calculated flow rate	Air speed, calculated flow rate, air temperature	Air speed, calculated flow rate	Air speed, calculated flow rate, air temperature
Diameter	100 mm	60 mm	16 mm			
Type of measurement						
Speed	Vane	Vane	Vane			
Temperature	Tc K	----	----	Tc K	----	Tc K
Measurement range						
Speed (m/s)	0.6 ... 25	0.5 ... 20	0.8 ... 20		10 ... 40	
Temperature (°C)	-25...+80 (*)		-25...+80 (*)			
Resolution						
Speed	0.01 m/s 0.1 km/h 1 ft/min 0.1 mph 0.1 knot					
Temperature	0.1°C	----	----	0.1°C	----	0.1°C
Accuracy						
Speed	±(0.3 m/s +1.5%f.s.)	±(0.3m/s +1.5%f.s.)	±(0.4 m/s +1.5%f.s.)			
Temperature	±0.8°C	----	----	±0.8°C	----	±0.8°C
Minimum speed	0.6m/s	0.5m/s	0.8m/s		10m/s	
Unit of measurement						
Speed	m/s – km/h – ft/min – mph – knot					
Flow rate	l/s - m³/s - m³/min - m³/h - ft³/s - ft³/min					
Pipeline section for flow rate calculation	0.0001...1.9999 m²					
Cable length	~2m					

(*) The indicated value refers to the vane's working range.

Temperature probes Pt100 using SICRAM module

Model	Type	Application range	Accuracy
TP472I	Immersion	-196°C...+500°C	±0.25°C (-196°C...+350°C) ±0.4°C (+350°C...+500°C)
TP472I.0	Immersion	-50°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP473P	Penetration	-50°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP473P.0	Penetration	-50°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP474C	Contact	-50°C...+400°C	±0.3°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP474C.0	Contact	-50°C...+400°C	±0.3°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP475A.0	Air	-50°C...+250°C	±0.3°C (-50°C...+250°C)
TP472I.5	Immersion	-50°C...+400°C	±0.3°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP472I.10	Immersion	-50°C...+400°C	±0.3°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP49A	Immersion	-70°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP49AC	Contact	-70°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP49AP	Penetration	-70°C...+400°C	±0.25°C (-50°C...+350°C) ±0.4°C (+350°C...+400°C)
TP875	Globe thermometer Ø 150 mm	-30°C...+120°C	±0.25°C
TP876	Globe thermometer Ø 50mm	-30°C...+120°C	±0.25°C
TP87	Immersion	-50°C...+200°C	±0.25°C
TP878 TP878.1	For solar panels	+5°C...+80°C	±0.25°C
TP879	Compost	-20°C...+120°C	±0.25°C

Common characteristics
Temperature drift @20°C

0.003%/°C

PURCHASING CODES

HD37AB1347: IAQ Monitor datalogger instrument complete with: **DeltaLog10** software (from version 0.1.5.0) for data download, monitor, and data processing on Personal Computer, 4 x 1.2V type AA Ni-MH rechargeable batteries 2200 mAh, operating manual, case. **Probes and cables have to be ordered separately.**

CARBON DIOXIDE, CARBON MONOXIDE, RELATIVE HUMIDITY, TEMPERATURE AND ATMOSPHERIC PRESSURE PROBES WITH SICRAM MODULE

P37AB147: CO₂ Carbon Dioxide, CO Carbon Monoxide, Relative Humidity RH, Temperature T and Atmospheric Pressure Patm combined probe. Dimensions 275 mm x 45 mm x 40 mm. Connection cable 2 meters long.

P37B147: CO₂ Carbon Dioxide, Relative Humidity RH, Temperature T and Atmospheric Pressure Patm combined probe. Dimensions 275 mm x 45 mm x 40 mm. Connection cable 2 meters long.

RELATIVE HUMIDITY AND TEMPERATURE PROBES EQUIPPED WITH SICRAM MODULE

HP472ACR: Combined probe %RH and temperature, dimensions Ø 26x170 mm. Connection cable 2 meters long.

HP473ACR: Combined probe %RH and temperature. Handle size Ø 26x130 mm, probe Ø 14x120 mm. Connection cable 2 meters long.

HP474ACR: Combined probe %RH and temperature. Handle size Ø 26x130 mm, probe Ø 14x215 mm. Connection cable 2 meters long.

HP475ACR: Combined probe %RH and temperature. Connection cable 2 meters long. Handle Ø 26x110mm. Stainless steel stem Ø 12x560mm. Point Ø 26x110 mm.

HP475AC1R: Combined probe %RH and temperature. Connection cable 2 meters long. Handle 80 mm. Stainless steel stem Ø 14x480 mm.

HP477DCR: Combined sword probe %RH and temperature. Connection cable 2 meters long. Handle Ø 26x110mm. Probe's stem 18x4mm, length 520 mm.

HP478ACR: Combined probe %RH and temperature. Dimensions Ø 14x130 mm. Connection cable 5 meters long.

HOT-WIRE WIND SPEED MEASUREMENT PROBES EQUIPPED WITH SICRAM MODULE

AP471 S1: Hot-wire telescopic probe, measuring range: 0.1...40m/s. Cable 2 meters long.

AP471 S2: Omni directional hot-wire telescopic probe, measuring range: 0.1 ... 5m/s. Cable 2 meters long.

AP471 S3: Hot-wire telescopic probe with terminal tip for easy position, measuring range: 0.1 ... 40m/s. Cable 2 meters long.

AP471 S4: Omni directional hot-wire telescopic probe with base, measuring range: 0.1 ... 5m/s. Cable 2 meters long.

VANE WIND SPEED MEASUREMENT PROBES WITH SICRAM MODULE

- AP472 S1:** Vane probe with thermocouple K, Ø 100 mm. Speed from 0.6 to 20 m/s; temperature from -25 to 80°C. Cable 2 meters long.
- AP472 S2:** Vane probe, Ø 60mm. Measurement range: 0.5...20m/s. Cable 2 meters long.
- AP472 S4L:** Vane probe, Ø 16 mm. Speed from 0.8 to 20m/s. Cable 2 meters long.
- AP472 S4LT:** Vane probe, Ø 16 mm. Speed from 0.8 to 20 m/s. Temperature from -25 to 80°C with thermocouple K sensor. Cable 2 meters long.
- AP472 S4H:** Vane probe, Ø 16 mm. Speed from 10 to 40m/s. Cable 2 meters long.
- AP472 S4HT:** Vane probe, Ø 16 mm. Speed from 10 to 40m/s. Temperature from -25 to 80°C with thermocouple K sensor. Cable 2 meters long.

TEMPERATURE MEASUREMENT PROBES EQUIPPED WITH SICRAM MODULE

- TP472I:** Pt100 sensor immersion probe. Stem Ø 3 mm, length 300 mm. Cable 2 meters long.
- TP472I.0:** Pt100 sensor immersion probe. Stem Ø 3 mm, length 230 mm. Cable 2 meters long.
- TP473P:** Pt100 sensor penetration probe. Stem Ø 4 mm, length 150 mm. Cable 2 meters long.
- TP473P.0:** Pt100 sensor penetration probe. Stem Ø 4 mm, length 150 mm. Cable 2 meters long.
- TP474C:** Pt100 sensor contact probe. Stem Ø 4 mm, length 230 mm, contact surface Ø 5 mm. Cable 2 meters long.
- TP474C.0:** Pt100 sensor contact probe. Stem Ø 4 mm, length 230 mm, contact surface Ø 5 mm. Cable 2 meters long.
- TP475A.0:** Pt100 sensor air probe. Stem Ø 4 mm, length 230 mm. Cable 2 meters long.
- TP472I.5:** Pt100 sensor immersion probe. Stem Ø 6 mm, length 500 mm. Cable 2 meters long.
- TP472I.10:** Pt100 sensor immersion probe. Stem Ø 6 mm, length 1000 mm. Cable 2 meters long.
- TP49A:** Pt100 sensor immersion probe. Stem Ø 2.7 mm, length 150 mm. Cable 2 meters long. Aluminium handle.
- TP49AC:** Pt100 sensor contact probe. Stem Ø 4 mm, length 150 mm. Cable 2 meters long. Aluminium handle.
- TP49AP:** Pt100 sensor penetration probe. Stem Ø 2.7 mm, length 150 mm. Cable 2 meters long. Aluminium handle.
- TP875:** Globe thermometer Ø 150 mm with handle. Cable 2 meters long.
- TP876:** Globe thermometer Ø 50 mm with handle. Cable 2 meters long.

TP87: Pt100 sensor immersion probe. Stem Ø 3 mm with handle, length 70mm. Cable 2 meters long.

TP878: Contact probe for solar panels. Cable 2 meters long.

TP878.1: Contact probe for solar panels. Cable 5 meters long.

TP879: Penetration probe compost. Stem Ø 8 mm, length 1 meter. Cable 2 meters long.

Accessories:

SWD10: Stabilized power supply at 100-240Vac/12Vdc-1A mains voltage.

VTRAP20: Tripod to be fixed to the instrument, maximum height 270 mm.

HD2110/RS: Connection cable with M12 connector on instrument's side and sub D 9-pole female connector for RS232C on PC's side.

HD2110/USB: Connection cable with M12 connector on instrument's side and USB 2.0 connector on PC's side.

HD40.1: Printer (it uses the HD2110/RS cable).

Accessories for HD40.1 printer:

BAT-40: Spare batteries for the HD40.1 printer with built-in temperature sensor.

RCT: Kit of four thermo-paper rolls, width 57 mm, diameter 32 mm.

Accessories for P37AB147 and P37B147 SICRAM probes:

MINICAN.12A: Nitrogen bottle for CO and CO₂ sensor calibration at Oppm. Volume 12 liters. **With adjustment valve.**

MINICAN.12A1: Nitrogen bottle for CO and CO₂ sensor calibration at Oppm. Volume 12 liters. **Without adjustment valve.**

ECO-SURE-2E CO: CO spare sensor (only P37AB147)

HD37.36: Kit connection tube between instrument and MINICAN.12A for CO calibration (only P37AB147).

HD37.37: Kit connection tube between instrument and MINICAN.12A for CO₂ calibration.

Accessories for Wind Speed SICRAM probes:

AST.1: Telescopic rod (fully closed 210 mm, fully open 870 mm) for AP472S1 and AP472S2 vanes.

AP 471S1.23.6: Fixed telescopic element Ø 16 x 300 mm, M10 male thread on one side, female thread on the other side. For AP472S1, AP472S2, AP472S4 vanes.

AP 471S1.23.7: Fixed telescopic element Ø 16 x 300 mm, M10 female thread on one side only. For AP472S1, AP472S2, AP472S4 vanes.

Accessories for Temperature-Humidity SICRAM probes:

HD33: Saturated solution at 33.0%RH@20°C for calibration of relative humidity probes, ring M24x1.5

HD75: Saturated solution at 75.4%RH@20°C for calibration of relative humidity probes, ring M24x1.5

P5: Protection grid in stainless steel for Ø 14mm probes.

P6: Complete protection in 20µ sintered AISI 316 for Ø 14mm probes.

P7: Complete protection in 10µ sintered PTFE for Ø 14mm probes.

P8: Protection grid in stainless steel and Poca for Ø 14mm probes, thread M12x1.



HD40.1



**HD21AB
HD21AB17**

▶ [GB] Indoor Air Quality
Monitors



- **HD21AB** and **HD21AB17** IAQ Monitors are bench-top/portable instruments manufactured by **Delta Ohm** for the analysis of indoor air quality (IAQ, Indoor Air Quality).



HD21AB17

The instruments simultaneously measure the parameters:

- Carbon Dioxide CO₂
- Carbon Monoxide CO
- Atmospheric Pressure

The **HD21AB17** instrument also measures:

- Temperature
- Relative Humidity

and it calculates:

- Dew Point
- Wet Bulb Temperature
- Absolute Humidity
- Mixing Ratio
- Enthalpy

HD21AB and **HD21AB17** are dataloggers with a memory capacity of 67600 recordings, divided in 64 blocks. They use the **DeltaLog10 software from version 0.1.5.3**.

Reference Standards: **ASHRAE 62.1 – 2004, Legislative Decree 81/2008**. These regulations apply to all confined spaces that could be used by people. Kitchens, baths, changing rooms and swimming pools are included, due to the presence of high humidity. You should take into account, in regard to air quality, possible chemical, physical and biological contaminants.

The instruments have a wide Dot Matrix graphic display with a resolution of 160x160 dots.

The instruments typical applications are:

- Measurement of IAQ (*Indoor Air Quality*) and comfort conditions in schools, offices and indoor spaces.
- Analysis and study of the Sick Building Syndrome, and of the resulting consequences.
- Checking the HVAC (*Heating, Ventilation and Air Conditioning*) system efficiency.
- Examination of IAQ conditions in factories to optimize microclimate and improve productivity.
- Building Automation checks.

Instrument Technical Data

Instrument

Dimensions

(Length x Width x Height) 210x90x40 mm (HD21AB)
300x90x40 mm (HD21AB17 with probe)

Weight

470 g (batteries included)

Materials

ABS, rubber

Display

Backlit, Dot Matrix
160x160 dots, visible area 52x42 mm

Operating conditions

Operating temperature

-5...50°C

Storage temperature

-25...65°C

Working relative humidity

0 ... 85% RH without condensation

Instrument uncertainty

± 1 digit @ 20°C

Power

Mains adapter (code SWD10) 12Vdc/1A

Batteries

4 x 1.2V Ni-MH rechargeable batteries AA type

Autonomy

8 hours of continuous use in measure mode

Power absorbed

< 45µA

with instrument off

Security of stored data

Unlimited

Serial interface:

Socket:

mini-USB

Type:

USB 1.1 or 2.0 not insulated

Baud rate:

460800

Data bits:

8

Parity:

None

Stop bits:

1

Flow control:

Xon-Xoff

Cable length:

Max 5 m

Memory

Divided in 64 blocks.

Storage capacity

67600 recordings.

Logging interval

Selectable among: 15, 30 seconds, 1, 2, 5, 10, 15, 20, 30 minutes and 1 hour.

Logging interval	Storage capacity	Logging interval	Storage capacity
15 seconds	About 11 days and 17 hours	10 minutes	About 1 year and 104 days
30 seconds	About 23 days and 11 hours	15 minutes	About 1 year and 339 days
1 minute	About 46 days and 22 hours	20 minutes	About 2 years and 208 days
2 minutes	About 93 days and 21 hours	30 minutes	About 3 years and 313 days
5 minutes	About 234 days and 17 hours	1 hour	About 7 years and 261 days

Technical data of the sensors

CO₂ Carbon Dioxide

Sensor

NDIR Dual Wavelength

Measurement range

0 ... 5000ppm

Sensor working range

-5 ... 50°C

Accuracy

±50ppm+3% of measurement

Resolution

1ppm

Temperature dependence

0.1%f.s./°C

Response time (T₉₀)

< 120 sec (air speed = 2m/sec)

Long-term stability

5% of measurement/5 years

CO Carbon Monoxide

Sensor	Electrochemical cell
Measurement range	0 ... 500ppm
Sensor working range	-5 ... 50°C
Accuracy	±3ppm+3% of measurement
Resolution	1ppm
Response time (T ₉₀)	< 50 sec
Long-term stability	5% of measurement/year
Service life	> 5 years in normal environment conditions

Atmospheric Pressure Patm

Type of sensor	Piezo-resistive
Measurement range	750 ... 1100 hPa
Accuracy	±1.5 hPa @ 25°C
Resolution	1 hPa
Long-term stability	2hPa/year
Temperature drift	±3hPa with temperature -20 ... +60°C

Relative Humidity RH (HD21AB17 only)

Type of sensor	Capacitive
Sensor protection	Stainless steel grid filter (on request 20µm sintered filter P6 in AISI 316 or 10µm sintered filter P7 in PTFE)
Measurement range	0 ... 100 % RH
Sensor working range	-20 ... +60°C
Accuracy	±2% (10÷90% RH) ±2.5% in the remaining range
Resolution	0.1°C
Temperature dependence	±2% on all temperature range
Hysteresis and repeatability	1% RH
Response time (T ₉₀)	< 20 sec (air speed = 2m/sec) without filter
Long-term stability	1%/year

Temperature T (HD21AB17 only)

Type of sensor	NTC 10kΩ
Measurement range	-20 ... +60°C
Accuracy	±0.2°C ±0.15% of measurement
Resolution	0.1°C
Response time (T ₉₀)	< 30 sec (air speed = 2m/sec)
Long-term stability	0.1°C/year

ORDERING CODES

HD21AB: IAQ Monitor datalogger kit. It measures CO, CO₂ and atmospheric pressure. Equipped with: **DeltaLog10** software (**version 0.1.5.3 and later**) for data download, monitor, and data processing on Personal Computer, 4 x 1.2V NiMH rechargeable batteries, operating manual, case. **The cables must be ordered separately.**

HD21AB17: IAQ Monitor datalogger kit. It measures CO, CO₂, atmospheric pressure, temperature and relative humidity. Equipped with: **DeltaLog10** software (**version 0.1.5.3 and later**) for data download, monitor, and data processing on Personal Computer, 4 x 1.2V NiMH rechargeable batteries, operating manual, case. **The cables must be ordered separately.**

Accessories:

- SWD10:** Stabilized power supply at 100-240Vac/12Vdc-1A mains voltage.
CP23: Connection cable with male mini-USB connector on instrument's side and USB 2.0 male connector on PC's side.
BAT-40: Spare batteries with built-in temperature sensor.
Accessories for CO and CO₂ sensors:
MINICAN.12A: Nitrogen bottle for CO and CO₂ sensor calibration at Oppm. Volume 12 liters. **With adjustment valve.**
MINICAN.12A1: Nitrogen bottle for CO and CO₂ sensor calibration at Oppm. Volume 12 liters. **Without adjustment valve.**
ECO-SURE-2E CO: CO spare sensor
HD37.36: Kit connection tube between instrument and MINICAN.12A for CO calibration.
HD37.37: Kit connection tube between instrument and MINICAN.12A for CO₂ calibration.

Accessories for Humidity sensor:

- HD75:** Saturated solution at 75.4%RH@20°C for calibration of relative humidity probes, ring M24x1.5 and M14x1.
HD33: Saturated solution at 33.0%RH@20°C for calibration of relative humidity probes, ring M24x1.5 and M14x1.
P5: Protection grid in stainless steel for Ø 14mm probes.
P6: Complete protection in 20µ sintered AISI 316 for Ø 14mm probes.
P7: Complete protection in 10µ sintered PTFE for Ø 14mm probes.
P8: Protection grid in stainless steel and Pocan for Ø 14mm probes, thread M12x1.



HD21AB

Manufacture of portable and bench top instruments

Current and voltage loop transmitters

Temperature - Humidity - Pressure

Air speed - Light - Acoustics

pH - Conductivity - Dissolved Oxygen - Turbidity

Elements for weather stations - Thermal Microclimate



SIT CENTRE N°124

Temperature - Humidity - Pressure - Air speed

Photometry/Radiometry - Acoustics

CE CONFORMITY

- **Safety:** EN61000-4-2, EN61010-1 Level 3
- **Electrostatic discharge:** EN61000-4-2 Level 3
- **Electric fast transients:** EN61000-4-4 livello 3, EN61000-4-5 Level 3
- **Voltage variations:** EN61000-4-11
- **Electromagnetic interference susceptibility:** IEC1000-4-3
- **Electromagnetic interference emission:** EN55022 class B





HD 37AB17D, HD 37B17D DATALOGGER RELATIVE HUMIDITY - TEMPERATURE - CO - CO₂

HD37AB17D and HD37B17D are data loggers able to measure and store at the same time the following parameters:

- RH relative Humidity
- T Room Temperature
- CO Carbon Monoxide (only HD37AB17D)
- CO₂ Carbon Dioxide

HD37AB17D and HD37B17D are able to investigate and monitor the quality of indoor air. Typical applications are examining the air quality in buildings where there are crowds of people (schools, hospitals, auditoriums, cafeterias, etc...) and workplaces to maximize comfort and in general to see if there are small leaks of CO, with danger of explosion or fire. This analysis allows you to adjust the air conditioning (temperature and humidity) and ventilation (air change per hour) to achieve a double objective: to achieve good air quality in accordance with ASHRAE standards and current BMI and energy savings.

HD37AB17D and HD37B17D are instruments set to fight the so-called sick building syndrome.

RH (Relative Humidity) measurement is obtained with a capacitive sensor.

T temperature is measured with a high precision NTC sensor.

The sensor for the measurement of CO (Carbon Monoxide, only for HD37AB17D) consists of two electrodes in an electrochemical cell suitable for detecting the presence of carbon monoxide, lethal for humans, in residential and industrial.

The measurement of CO₂ (carbon dioxide) is obtained with a special infrared sensor (NDIR technology: Non-Dispersive Infrared Technology) that, by using a double filter and a particular measurement technique, ensures accurate measurements and stable for a long time. The presence of a protective membrane, which is spread through the air portion, protects the sensor from dust and weather.

HD37AB17D and HD37B17D are data loggers capable of storing the measurements, every user preset.

HD37AB17D and HD37B17D can be connected to the PC via the USB input. Instruments are supplied with DeltaLog13 software which manages the operations of connection to the PC, calibration of RH sensors, CO (only HD37AB17D) and CO₂, setting of the operating parameters of the instrument, data transfer, presentation graphics and printing of measurements acquired or stored.

The software DeltaLog13 is able to assess OA % parameter by an appropriate procedure (percentage of outside air), according to the following formula:

Using appropriate procedure, the Software DeltaLog13 can evaluate the parameter % OA (percentage of external air), according to the following formula:

$$\%OA = \frac{X_r - X_s}{X_r - X_0} \cdot 100$$

whereas:

X = CO₂ in return air

X_s = CO₂ in the outlet air

X₀ = CO₂ in the external air

The power supply of the instrument is provided by a 2 Ni-MH rechargeable batteries package (code BAT-20), that that allows 8 hours of continuous working in acquisition mode.

Acquisition frequency:

frequency	samples per minute	storage capacity
3 sec.	20 samples per minute	16 hours
6 sec.	10 samples per minute	1 day 9 hours
12 sec.	5 samples per minute	2 days 12 hours
15 sec.	4 samples per minute	3 days 12 hours
30 sec.	2 samples per minute	6 days 12 hours
60 sec. = 1 minutes	1 sample per minute	13 days 12 hours
120 sec. = 2 minutes	1 sample per 2 minutes	27 days 12 hours
180 sec. = 3 minutes	1 sample per 3 minutes	41 days 12 hours
240 sec. = 4 minutes	1 sample per 5 minutes	55 days 12 hours
300 sec. = 5 minutes	1 sample per 5 minutes	69 days

Technical Features

Dimensions	275 mm x 45 mm x 40 mm
Weight	230 g (batteries included)
Materials	ABS
Mains power supply (code SWD06)	Batteries charger 100-240Vac/6Vdc-1A
Batteries	Package with 2 rechargeable batteries 1.2V type AA (NiMH)
Autonomy	8 hours of continuous working in measurement mode
Current absorbed with instrument off	200µA
Instrument working temperature	5°C ... 50°C
Working relative humidity	5%RH ... 95%RH no condensed
Temperature / Storage humidity	-25°C ... +70°C / 10%RH ... 90%RH no condensed
Safety of the stored data	Unlimited

Connections

USB interface	USB 2.0 cable B type Baudrate 460800
Charger Batteries power supply (code SWD06)	2 - poles connector (positive at the centre) Output voltage: 6Vdc Maximum current: 1600mA (9,60 VA Max).

Measuring rate

1 sample every three seconds

Storage capacity

20000 Records
Every records includes the followingf:
- date and time
- measurement of the carbon dioxide (CO₂)
- measurement of the carbon monoxide (CO- only HD37AB17D)
- measurement of the relative humidity (RH)
- measurement of the temperature (T)



Logging interval selectable within: 3,6,12,15,30,60 seconds, 2,3,4,5 minutes.
The stored values represent the average value of the samples that are stored every three seconds.

Response time (T_{90}) < 50 sec.
Long term stability 5% of the measure/year
Expected life > 5 years in normal environmental conditions

Printing interval selectable within: 3,6,12,15,30,60 seconds, 2,3,4,5 minutes.
The printed values represent the average value of the samples that are stored every three seconds.

Sensor Features
Relative Humidity RH
Sensor protection

Capacitive sensor
Net filter made of stainless steel (upon request filter P6 in AISI316 sintered 20 μ m or filter P7 in PTFE sintered 10 μ m)
5...100 % RH
-20...+60°C
 $\pm 2\%$ (10÷90%RH) $\pm 2,5\%$ in the remaining range
0,1%
 $\pm 2\%$ on all the temperature range
1% RH
 $\pm 2\%$ on all temperature range
< 20 sec. (air speed = 2m/sec) without filter
1%/year

Measurement range
Sensor working range
Accuracy
Resolution
Thermal effects
Hysteresis and repeatability
Temperature dependence
Response time (T_{90})
Long term stability

Temperature T

Sensor type NTC 10K Ω
Measurement range -20...+60°C
Accuracy $\pm 0,2^\circ\text{C} \pm 0,15\%$ of the measure
Resolution 0,1°C
Response time (T_{90}) < 30 sec. (air speed = 2m/sec)
Long term stability 0.1°C/year

Carbon monoxide CO (only HD37AB17D)

Sensor Electro chemical cell
Measurement range 0...500ppm
Sensor working range -5...50°C
Accuracy $\pm 3\text{ppm} + 3\%$ of the measure value
Resolution 1ppm

Carbon dioxide CO₂

Sensor NDIR with a double wave length
Measurement range 0...5000 ppm
Sensor working range -5...50°C
Accuracy $\pm 50\text{ppm} + 3\%$ of the measurement
Resolution 1ppm
Thermal effects 0,1%f.s./°C
Response time (T_{90}) < 120 sec. (air speed = 2m/sec)
Long term stability 5% of the measure/ 5 years

Purchasing codes

HD37AB17D: The kit consisting of: **HD37AB17D** instrument to measure CO (Carbon monoxide), CO₂ (Carbon dioxide), RH (Relative Humidity), T (Temperature), **DeltaLog13** Software, USB cable code **CP22**, **SWD06** power supply, **BAT-20** batteries package, instruction manual, carrying case.

HD37B17D: instrument to measure CO₂ (Carbon dioxide), RH (Relative Humidity), T (Temperature), **DeltaLog13** Software, USB cable code **CP22**, **SWD06** power supply, **BAT-20** batteries package, instruction manual, carrying case.

Accessories:

VTRAP20: Instrument tripod, maximum height 270mm.

SWD06: 100-240Vac/6Vdc-1A mains voltage power supply.

BAT-20: Replacement batteries pack for HD37AB17D and HD37B17D instruments with integrated temperature sensor.

P5: Stainless steel grid protection for probes diameter 14, thread M12x1.

P6: Sintered stainless steel 10 μ grid protection, for probes diameter 14, thread M12x1.

P7: 10 μ , PTFE protection for probes diameter 14, thread M12x1.

P8: Stainless steel and Pocaan protection for probes diameter 14, thread M12x1.

HD75: Saturated solution for testing the Relative Humidity with 75% RH, equipped with adapter for probes diameter 14, thread M12x1.

HD33: Saturated solution for testing the Relative Humidity with 33% RH, equipped with adapter for probes diameter 14, thread M12x1.


MINICAN.12A: Cylinder of nitrogen for the calibration of CO and CO₂ at 0ppm. Volume 12 litres. **With adjustment valve.**

MINICAN.12A1: Cylinder of nitrogen for the calibration of CO and CO₂ at 0ppm. Volume 12 litres. **Without adjustment valve.**

ECO-SURE-2E CO: Spare CO sensor.

HD37.36: Kit connection pipe between instrument and MINICAN.12A for the calibration of CO.

HD37.37: Kit connection pipe between instrument and MINICAN.12A for the calibration of CO₂.

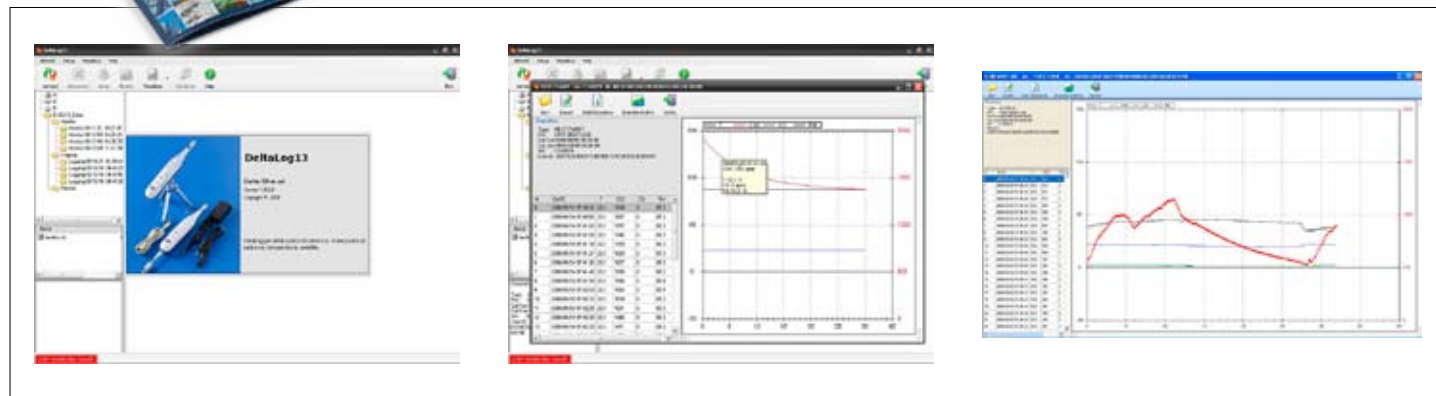



**HD 37BT..., HD 37BTV..., HD 377BT..., HD 37V7TV...
CO₂, CO₂ AND TEMPERATURE TRANSMITTERS**

The HD37BT... and HD37VBT... series transmitters are used mainly in air quality control by measuring CO₂ (Carbon Dioxide) in the ventilation systems. This allows you to vary the number of air change per hour according to ASHRAE and IMC norms. The purpose is twofold: to have a good air quality in the presence of people and to save energy, increasing or decreasing parts of air per hour, depending on the air quality set.

The use is for environments where there is overcrowding of people, discontinuous crowding, cafeterias, auditoriums, schools, hospitals, greenhouses, livestock breeding, etc.

The HD377BT... and HD37V7BT... models measure, in addition to CO₂, also the temperature. **The analog outputs, current 4...20mA or voltage 0...10Vdc, should be specified when ordering.** All transmitters have an alarm digital output suitable to control, for example, an external relay coil. All transmitters have a digital alarm suitable to control eg. an external relay coil. The alarm is activated to pass a threshold set at the factory to 1500ppm, the threshold beyond which a man feels uncomfortable. The sensor element is a particular infrared sensor (NDIR technology: Non-Dispersive Infrared Technology) which, by using a double filter and a particular measurement technique, compensates for the effect of aging thus ensuring accurate and stable measurements over a long time.

The use of a protective membrane, which is spread through the air to be analyzed, minimizes the negative effect of atmospheric dust and the performance of the transmitter. At the entrance of the intake air flow in the transmitter is a filter that you can remove and clean.

The installation methods may be:

- Wall mounted – **TV Version**,
- With power flow horizontally fixed to the container, to be extent ventilation duct – **TO Version**,
- Wall outlet with flow separate with two tubes, connected to the electronics to

the extent ventilation duct – **TC Version**,

In versions with power flow channel and separate electronics, the air is drawn into the measurement chamber. The same flow then returns to the channel through a second tube. **The air flow needs to be at least 1m/s.**

To fix the air inlet to the duct, you can use the HD9008.31 flange, a 3/8" universal biconical fitting or a PG16 metallic fairlead with a Ø 14 mm internal diameter.

The air inlets connected to the transmitter by means of flexible tubes are attached to the channels flowing air: we supply air inlets for square or rectangular ducts (code HD3719) and for circular ducts (code HD3721). In order to maintain the specified accuracy, the cable length should be 1m.

Technical characteristics			Notes
CO ₂ Measurement Principle		Double wave length infrared technology (NDIR)	
CO ₂ Measurement Range		0 ... 2000ppm 0 ... 5000ppm	
CO ₂ Accuracy	f.s. 2000ppm	±(50ppm+3% of measurement)	at 20°C, 50%RH and 1013hPa
	f.s. 5000ppm	±(50ppm+4% of measurement)	
Temperature Measurement Range		0 ... +50°C	Models HD377BT... and HD37V7BT...
Temperature Accuracy		±0.3°C	
Analog Outputs (according to the models)		4 ... 20mA 0 ... 10VDC	R _i < 500Ω R _i > 10kΩ
	Digital Output (all models)	Type CO ₂ Threshold Vmax Pmax	Open-collector (N.O.) 1500ppm (*) 40VDC 400mW
Power supply		16...40Vdc or 24Vac ±10%	
Absorption		<2W	
Startup Stabilization Time		15 minutes	To guarantee the stated accuracy.
Response Time T _{63%}		120s	Wind speed of at least 1m/s.
Temperature effect		0.2%/°C CO ₂	Typical value
Atmospheric Pressure effect		1.6%/kPa	Deviation compared to the value at 101kPa
Long-term Stability		5% of the range / 5 years	Typical value
Calibration		At one point at 0ppm or 400ppm clear air	Automatic detection of the applied CO ₂ level.
Working Temperature/Relative Humidity		-5 ... +50°C, 0 ... 95%RH without condensation	
Storage Temperature/Relative Humidity		-10 ... +60°C, 0 ... 95%RH without condensation	
Electronics Protection Degree		IP21	Wall mounted models (TV).
		IP65	Horizontal probe models (TO), probe excluded.
		IP65	Separate probe models (TC), probe excluded.
Case size		80x84x44	Probe excluded.
Case material		ABS	

Model description

Model	Type of output		Measured quantities	
	4 ... 20mA	0 ... 10Vdc	CO ₂	Temperature
HD37BT...	✓		✓	
HD37VBT...		✓	✓	
HD377BT...	✓		✓	✓
HD37V7BT...		✓	✓	✓

Model	Probe	CO ₂ Measurement Range
...BTV	Wall mounted model	0...2000ppm
...BTV.1	Wall mounted model	0...5000ppm
...BTO.1	CO ₂ model with horizontal air inlet L=115mm CO ₂ /temperature model with horizontal air inlet L=120mm	0...2000ppm
...BTO.11	CO ₂ model with horizontal air inlet L=115mm CO ₂ /temperature model with horizontal air inlet L=120mm	0...5000ppm
...BTO.2	CO ₂ model with horizontal air inlet L=315mm CO ₂ /temperature model with horizontal air inlet L=320mm	0...2000ppm
...BTO.21	CO ₂ model with horizontal air inlet L=315mm CO ₂ /temperature model with horizontal air inlet L=320mm	0...5000ppm
...BTC	Wall mounted model with attachments for an air inlet separate from the duct	0...2000ppm
...BTC.1	Wall mounted model with attachments for an air inlet separate from the duct	0...5000ppm

Calibration


The instruments are calibrated at the factory and do not usually require further action by the user.

However, it is possible to perform a new calibration that corrects the sensor offset:

- (approx. 400ppm) in clean air
- to 0ppm with nitrogen bottles (code MINICAN.20A).

The instrument is able to recognize automatically the calibration methods used: whether 400ppm or 0ppm. The calibration should be performed one point only: each new calibration cancels the previous one.

Proceed as follows:

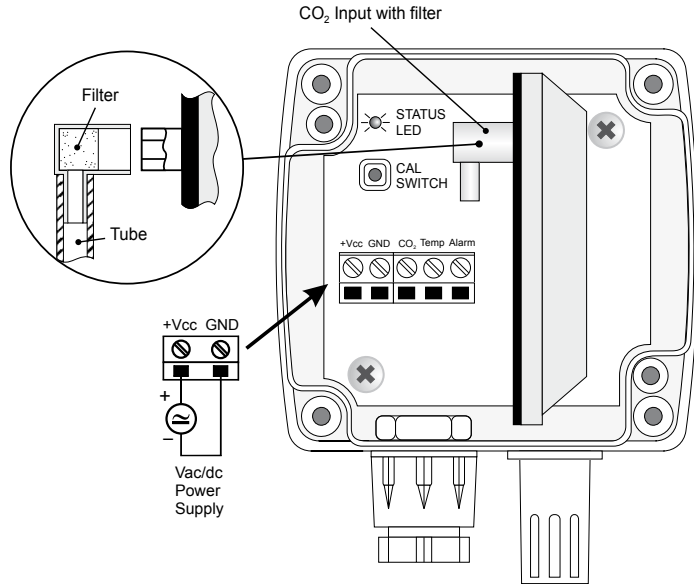

Open the instrument top cover to discover the CAL SWITCH calibration key on the board and the calibration gas inlet.

1. Let open the entrance if you want to calibrate around 400ppm: in which case, be sure to attach the instrument clean air.
2. For a calibration at 0ppm, connect the tube from the nitrogen bottle to the CO₂ input. Adjust the bottle flow meter on a flow from 0.3 to 0.5l/min.
3. Power up the instrument according to specifications and wait at least 15 minutes before proceeding.
4. Supply CO₂ for at least 2 minutes so as to stabilize the measurement.
5. Continue to provide CO₂ to the instrument, hold the CAL SWITCH key pressed for at least 5 seconds until the STATUS LED flashes: the two-minute calibration starts. At this stage the instrument is calibrated to measure CO₂ and a value close to 0ppm, if you use the nitrogen cylinder, to 400ppm, if you calibrate to clean air.
6. Wait the **two minutes** necessary for calibration without changing the working conditions.
7. When the LED turns off, the calibration is completed.



HD37VBT

Installation Notes

The choice of the number of CO₂ transmitters to be used in a typical installation and location, should be based on the fact that the distribution CO₂ in the atmosphere is influenced by the same factors that determine temperature distribution. Among these factors are convection, diffusion and forced air movement in the environment.


For an accurate control, you should use a CO₂ transmitter (TV model) in any place where there is a temperature control. You can also opt for a single device (TO or TC model) installed at the point of air quality control.

For the wall mounted TV models


The transmitter has to be installed into a location with good air circulation, away from doors, windows or entry points of fresh air from outside. The height from the floor should be at least 1.5 meters.

For the TO models with horizontal air inlet from the duct


- The transmitter should be installed so that the air inlet is correctly oriented with the flow into the channel. In the probe head there is an arrow indicating the correct direction of airflow. To facilitate installation, on the left side face of the container, **near the air input to the sensor**, is engraved with the following symbol.




- To set the probe into a duct, with flat surface (square or rectangular), use the HD9008.31.12 flange, a PG16 metallic fairlead with Ø 14 mm internal hole, or a 3/8" biconical universal fitting with Ø 14 mm internal hole.



HD9008.31 flange




PG16 metallic fairlead
D = 10...14mm
L = 6.5mm
H = 23 mm
A = PG16



Biconical universal fitting
L = 35 mm
D = 14 mm
A = 3/8"

For the TC models with air inlet separate from electronics

We have two probes: One (code HD3719) for flat walls ducts (square or rectangular section), another (code HD3721) for circular section ducts. Please see the following figure.

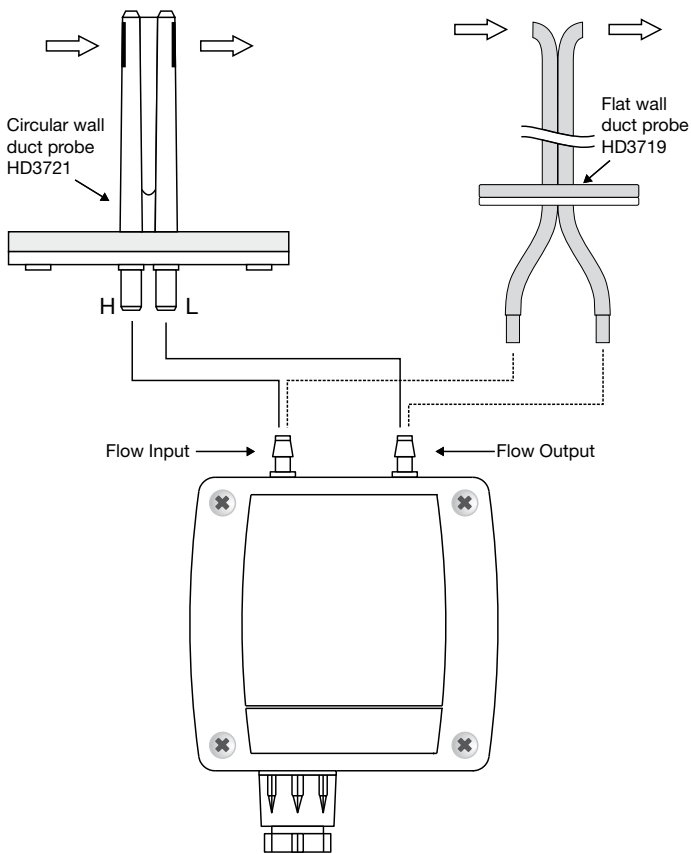

The duct air inlet should be oriented so that the flow enters from the entrance connected to the junction on the left in the container leaving from the right one.

Electrical connections


Power supply

Supply the instrument with the voltage according to what indicated in the technical characteristics: the power supply terminals are indicated by +Vdc and GND.

Analog Outputs

The output signal is acquired, depending on model:

- Between the CO₂ and GND terminals for CO₂ transmitters,
- Between the CO₂ and GND, Temp and GND terminals for CO₂ and temperature transmitters,

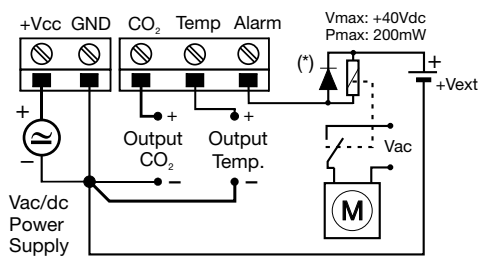

HD37BTC



Digital Output

The diagram shows an example of application for a digital output that controls, in this case, an **external relay** coil. When exceeding the alert threshold (1500ppm), the relay contact closes and activates an adjustment device.

(*) **Warning:** Protect the digital output by applying a protection diode as shown in the figure.



Do not exceed the maximum reverse voltage and power limits indicated in the technical information.

HD37BTV / HD377BTV sizes

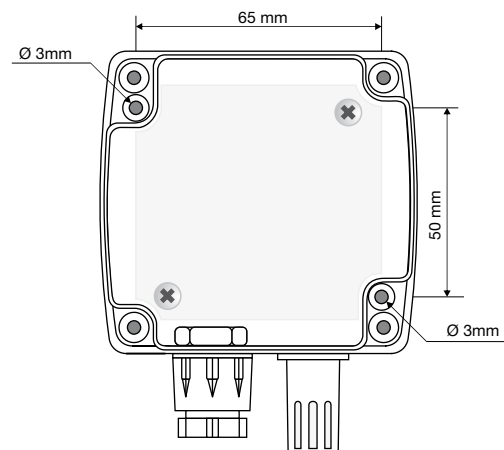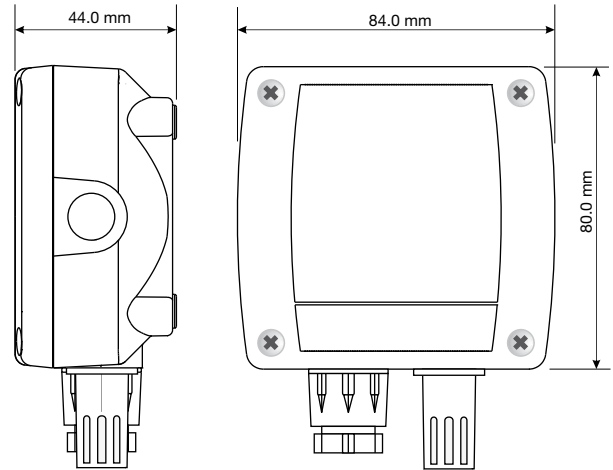


Drilling template

Duct air inlet sizes

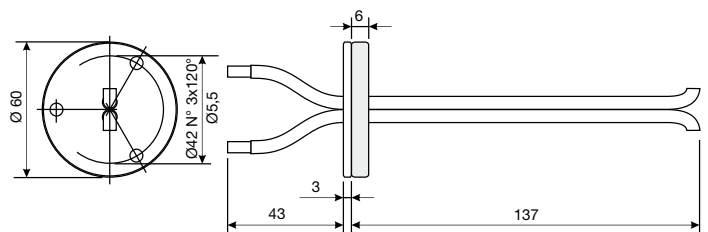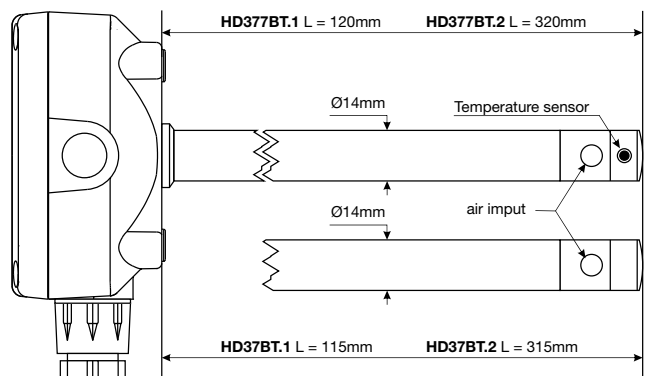

HD3719 Duct Probe

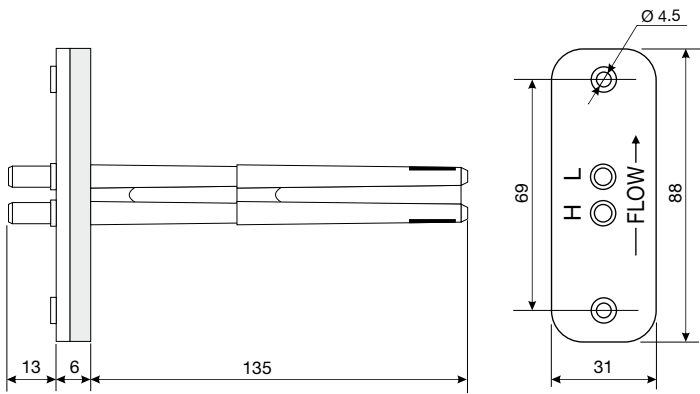

AP3721 Duct Probe

Purchasing codes

HD37BT...: CO₂ active transmitter, analog output 4...20mA. Power supply 16...40VDC or 24VAC. Functioning temperature -5°C ... +50°C. Alarm digital output for levels of CO₂ > 1500ppm.

HD37BTBV: Wall mounted one-piece version. CO₂ Measurement Range 0...2000ppm.

HD37BTB1.1: Wall mounted one-piece version. CO₂ Measurement Range 0...5000ppm.

HD37BT0.1: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=115mm. CO₂ Measurement Range 0...2000ppm.

HD37BT0.11: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=115mm. CO₂ Measurement Range 0...5000ppm.

HD37BT0.2: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=315mm. CO₂ Measurement Range 0...2000ppm.

HD37BT0.21: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=315mm. CO₂ Measurement Range 0...5000ppm.

HD37BTB1C: Wall mounted one-piece version with attachments for an air inlet separate from the duct CO₂ Measurement Range 0...2000ppm.

HD37BTB1.1: Wall mounted one-piece version with attachments for an air inlet separate from the duct CO₂ Measurement Range 0...5000ppm.

HD37VBT...: CO₂ active transmitter, analog output 0...10VDC. Power supply 16...40VDC or 24VAC. Functioning temperature -5°C ... +50°C. Alarm digital output for levels of CO₂ > 1500ppm.

HD37VBTBV: Wall mounted one-piece version. CO₂ Measurement Range 0...2000ppm.

HD37VBTB1.1: Wall mounted one-piece version. CO₂ Measurement Range 0...5000ppm.

HD37VBT0.1: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=115mm. CO₂ Measurement Range 0...2000ppm.

HD37VBT0.11: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=115mm. CO₂ Measurement Range 0...5000ppm.

HD37VBT0.2: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=315mm. CO₂ Measurement Range 0...2000ppm.

HD37VBT0.21: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=315mm. CO₂ Measurement Range 0...5000ppm.

HD37VBTB1C: Wall mounted one-piece version with attachments for an air inlet separate from the duct CO₂ Measurement Range 0...2000ppm.

HD37VBTB1.1: Wall mounted one-piece version with attachments for an air inlet separate from the duct CO₂ Measurement Range 0...5000ppm.

HD377BT...: CO₂ and temperature active transmitter, analog output 4...20mA. Temperature range 0...+50°C, non-modifiable. Power supply 16...40VDC or 24VAC. Functioning temperature -5°C ... +50°C. Alarm digital output for levels of CO₂ > 1500ppm.

HD377BTBV: Wall mounted one-piece version. CO₂ Measurement Range 0...2000ppm.

HD377BTB1.1: Wall mounted one-piece version. CO₂ Measurement Range 0...5000ppm.

HD377BT0.1: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=120mm. CO₂ Measurement Range 0...2000ppm.

HD377BT0.11: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=120mm. CO₂ Measurement Range 0...5000ppm.

HD377BT0.2: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=320mm. CO₂ Measurement Range 0...2000ppm.

HD377BT0.21: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=320mm. CO₂ Measurement Range 0...5000ppm.

HD37V7BT...: CO₂ and temperature active transmitter, analog outputs 0...10VDC. Temperature range 0...+50°C, non-modifiable. Power supply 16...40VDC or 24VAC. Functioning temperature -5°C ... +50°C. Alarm digital output for levels of CO₂ > 1500ppm.

HD37V7BTBV: Wall mounted one-piece version. CO₂ Measurement Range 0...2000ppm.

HD37V7BTB1.1: Wall mounted one-piece version. CO₂ Measurement Range 0...5000ppm.

HD37V7BT0.1: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=120mm. CO₂ Measurement Range 0...2000ppm.

HD37V7BT0.11: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=120mm. CO₂ Measurement Range 0...5000ppm.

HD37V7BT0.2: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=320mm. CO₂ Measurement Range 0...2000ppm.

HD37V7BT0.21: Duct version with horizontal air inlet in AISI 304 steel diameter 14mm, L=320mm. CO₂ Measurement Range 0...5000ppm.

HD9008.31: Wall flange with fairlead for Ø 14mm probe mounting.

PG16: Metallic fairlead for Ø 14mm probes.

HD3719: Air inlet for square or cylindrical ducts. Two 1 m tube segments Ø3.2/Ø6.4. For ...BTC and ...BTC.1 models.

HD3721: Air inlet for cylindrical ducts, in plastic material. Two 1 m tube segments Ø3.2/Ø6.4. For ...BTC and ...BTC.1 models.

MINICAN.20A: Nitrogen bottle for CO₂ at Oppm calibration. Volume 20 liters. With adjustment valve.

MINICAN.20A1: Nitrogen bottle for CO₂ at Oppm calibration. Volume 20 liters. Without adjustment valve.

T37...m: PVC Crystal tube Ø int. 3,2mm / Ø ext. 6,4mm, length upon request.

Order codes for CO₂ transmitters

HD37 **X** **B** **T** **X** **X**

No sign = Range CO₂ 0...2000ppm.
1 = Range CO₂ 0...5000ppm.

V = Wall mounted
0.1 = 115mm air inlet from ducts
0.2 = 315mm air inlet from ducts
C = Separate probe from ducts

B = CO₂ output

No sign = Analog output 4...20mA
V = Analog output 0...10Vdc

Order codes for CO₂ and temperature transmitters

HD37 **X** **7B** **T** **X** **X**

No sign = Range CO₂ 0...2000ppm.
1 = Range CO₂ 0...5000ppm.

V = Wall mounted
0.1 = 120mm air inlet from ducts
0.2 = 320mm air inlet from ducts

B = CO₂ output
7 = Temperature output

No sign = Analog output 4...20mA
V = Analog output 0...10Vdc



HD 45...
HD 46...

▶ [GB] Transmitters and regulators for humidity, temperature and CO₂ HD45... and HD46... series



The instruments of the series **HD45** and **HD46** are transmitters, indicators and controllers, they measure and control, depending on the model, the following environmental parameters:

- Relative humidity (RH)
- Ambient temperature (T)
- Carbon dioxide (CO₂)
- Dew Point Temperature (DP, calculated measurement)

They are suitable for monitoring the air quality in indoor environments. Typical applications include checking air quality in all buildings occupied by people (schools, hospitals, auditoria, work places, canteens, etc.). This analysis allows the managing of conditioning plants (temperature and humidity) and ventilation (recycle air/



hour) in order to reach a double purpose: getting a good air quality in accordance with ASHRAE and IMC regulations and energy saving.

The measurement of RH (Relative Humidity) is obtained with a capacitive sensor. In models **HD46** ... the relative humidity and temperature sensors with their calibration data are contained within an easily replaceable module. The instrument can also calculate the information on the dew point.

The temperature T is measured with a high precision NTC sensor.

The measurement of CO₂ (carbon dioxide) is obtained with a special infrared sensor (**NDIR** technology: Non-Dispersive Infrared Technology), which, thanks to a double filter and a particular measurement technique, ensures accurate measurements and stable measurements over time. The infrared sensor is equipped with a protection membrane which provides protection from dust particles and aggressive air agents to assure the sensor's long life. The instrument can be wall mounted and sensors are all inside.

The instruments are factory calibrated and require no further adjustment by the installer. Versions are available with **analog voltage output 0÷10V** or **analog current output 4÷20mA**, or connectable to a PC via **RS485** with **MODBUS RTU** protocol, which allows connection of multiple transmitters on the same network.

The versions with **relay** allow to monitor the measured environmental parameters when the user-settable thresholds are exceeded. The activation of the control is highlighted by the LED indicators (only on models HD46 ... R). The operation of the relay is very versatile, having modes of activation above and below the threshold, and with single or double threshold modes. The thresholds are configurable by the user throughout the whole

measurement range.

The LCD display option allows instant viewing of all the measurements taken by the instrument.

The models **HD45 BVR** and **HD45 BAR** are distinguished by the ability to indicate an immediate level of air quality, through turning on of the LED indicators associated with graphic symbols.

All the functions of the instrument can be quickly and intuitively configured connecting the instrument to the PC.

The instruments are easy to use, with complete configuration possibilities, which makes them versatile and able to meet many needs in various application fields. The instruments come with a standard configuration that makes them immediately operational. Upon request, the devices can be supplied with custom configurations.

HD46... series models can be equipped with keyboard that allows you to easily configure the instrument even without a connection to a PC. The models having a keypad are fitted with backlit display, activated by pushing a button.

Models of the series **HD45** ... provided with relay have a hardware switch that allows quick selection of the threshold between a set of preset values.

All models perform continuous "logging" of the measures, and data can be transferred to the PC.

The instruments work with 24Vac or 15...35Vdc power supply.

Technical data

Characteristics of the sensors

Relative humidity RH (for models HD45 17..., HD46 17... and HD46 17B...)	
Sensor	Capacitive
Measuring range	0...100 % RH -40...+85°C Dew point Td
Working range of the sensor	-40...+80°C
Accuracy	±2% (10...90%RH) @ 20°C, ±2.5% in the remaining range. For Dew point, see table.
Resolution	0.1%
Temperature dependence	2% on the whole temperature range
Hysteresis and repeatability	1%RH
Response time (T ₉₀)	<20 s (air speed = 2m/s and stable temperature)
Long-term stability	1%/year

Temperature T (for models HD45 17..., HD45 7B..., HD46 17... and HD46 17B...)	
Sensor type	NTC 10KΩ
Measuring range	-30...+85°C (-22...+185°F)
Accuracy	±0.2°C ±0.15% of measured value within 0...70°C Except models with current output ±0.3°C ±0.15% of measured value within -30...0°C and 70...85°C
Accuracy	For models with current output ±0.5°C ±0.15% of measured value within -30...+85°C
Resolution	0.1°C
Response time (T ₉₀)	<30 s (air speed = 2m/s)
Long-term stability	0.1°C/year

Carbon dioxide CO ₂ (for models HD45 7B..., HD45 B... and HD46 17B...)	
Sensor	Dual wavelength NDIR
Measuring range	0...5000 ppm
Working range of the sensor	-5...50°C
Accuracy	±(50ppm+3% of the measured value) @ 20°C and 1013hPa
Resolution	1ppm
Temperature dependence	0.1%f.s./°C
Response time (T ₉₀)	<120 s (air speed = 2m/s and stable temperature)
Long-term stability	5% of the measured value / 5 years

Accuracy of the dew point Td (°C)

The dew point is a calculated quantity that depends on the accuracy of the calibration of relative humidity and temperature. The values given below refer to accuracy of ± 0.25 °C, 1013.25mbar, ± 2.5% RH.

		Relative humidity(%)					
		10	30	50	70	90	100
Temperature (°C)	-20	2.50	1.00	0.71	0.58	--	--
	0	2.84	1.11	0.78	0.64	0.56	0.50
	20	3.34	1.32	0.92	0.75	0.64	0.62
	50	4.16	1.64	1.12	0.90	0.77	0.74
	100	5.28	2.07	1.42	1.13	0.97	0.91

Characteristics of the instrument

Measuring frequency	1 sample every 3 seconds
Storage capacity	2304 records
Storage interval	Selectable within 30s, 1m, and 5m The stored values represent the average values of samples collected every 3 seconds in selected storage interval.
Serial output	Serial output for USB (mini-USB/USB cable with adapter cod. RS45 or RS45I) RS485 MODBUS-RTU (only HD45...S... and HD46...S...)
Safety of stored data	Unlimited
Analogue output	0...10Vdc ($R_i > 10k\Omega$) (only HD45...V... and HD46...V) 11Vdc outside the measuring range 4...20mA ($R_{L\text{MAX}} = 400\Omega$) (only HD45...A... and HD46...A) 22mA outside the measuring range Active sourcing current output
Relay output	Two-state (only HD45...R and HD46...R) Contact: max 1A @ 30Vdc resistive load
Power supply	24Vac \pm 10% (50...60Hz) or 15...35Vdc
Power consumption	100 mW (except models with current output) 400 mW (for models with current output)
Stabilising time	15 minutes (to guarantee the declared accuracy)
Working temperature of the instrument	0°C ... 50°C
Working humidity of the instrument	0%RH ... 95%RH no condensate
Dimensions (LxHxW)	80 x 80 x 30 mm (HD45.17...) 80 x 80 x 34 mm (HD45.B... and HD45.7B...) 120 x 80 x 30 mm (HD46.17...) 120 x 80 x 34 mm (HD46.17B...)
Weight	50 g
Housing material	ABS


Installation

The container is easy and quick to open. Simply press the two tabs of the container to remove the front panel to have immediately access to the terminal block connections and fixing holes.




Electrical connections


Series HD45...




HD45 B...V / HD45 B...A
HD45 B...VR / HD45 B...AR



HD45 7B...V / HD45 7B...A
HD45 7B...VR / HD45 7B...AR




HD45 17...V / HD45 17...A
HD45 17...VR / HD45 17...AR




HD45...R
HD45...S


Series HD46...




HD46...R
HD46...SR



HD46 17B...V
HD46 17B...A



HD46 17...V
HD46 17...A



HD46...S

Configuration


Instruments are provided with serial output, easily accessible on the side of the instrument that allows you to connect to the USB port of your PC using the cable RS45 or RS45I with built-in adapter, to get custom configurations.

With the RS45 cable, the instrument is powered directly from the USB port of your PC, thus enabling the configuration of the instrument in the field using a laptop before installing fixed.

RS485 Connection

Models with RS485 output use the MODBUS RTU protocol.


To connect to the PC, interpose a RS232C/RS485 or USB/RS485 converter.

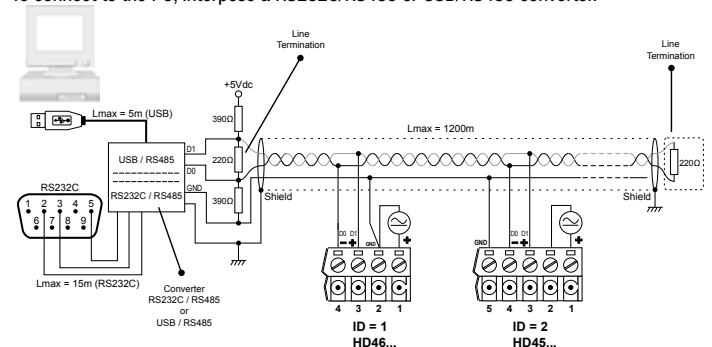


Dimensions of the housing

All dimensions are expressed in mm.

Series HD45...




**HD45 B...
HD45 7B...**

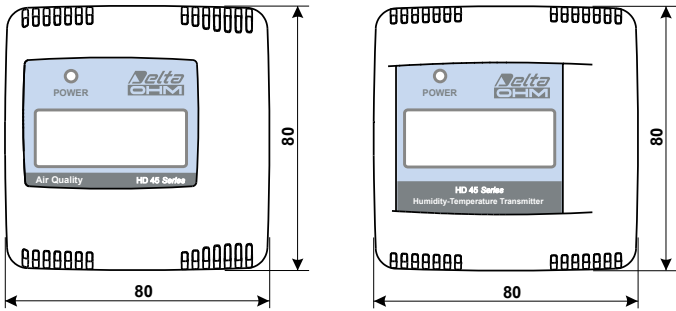


HD45 17...

Series HD46...




HD46 17B...

HD46 17...

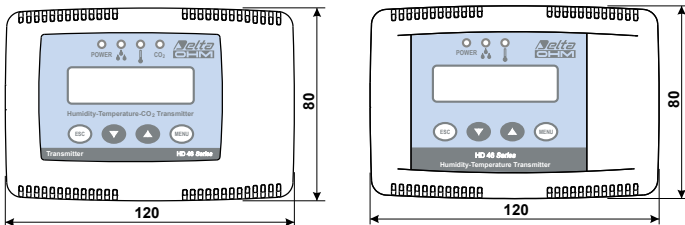

Fixing holes

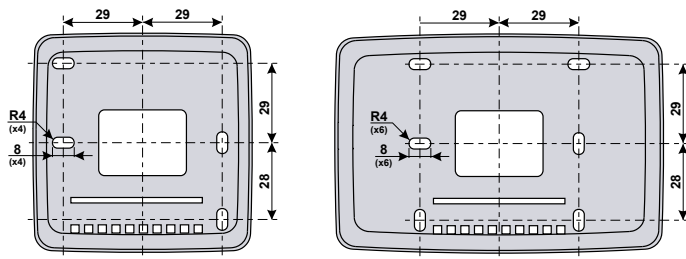

HD45...

HD46...

Available models

The instruments are available in the following versions:

- HD45 17...** Humidity and temperature
- HD45 7B...** Temperature and CO₂
- HD45 B...** CO₂
- HD46 17B...** Humidity, temperature, and CO₂
- HD46 17...** Humidity and temperature

Optionally you can have the analog output 0...10Vdc (option **V**) or 4...20mA (option **A**) for each quantity measured by instrument, or RS485 serial output (option **S**). There are no models with both types of output.

There is the option with only relay (option **R**). In models **HD46 ...** there is one relay for each quantity measured by the instrument. In models **HD45 ...** there is one relay that can be associated with one of the quantities measured by the instrument.

It is possible to have the relay output (or the outputs) together with serial output RS485 (option **SR**).

The relay output together with the analog output (option **VR** or **AR**) is only available on models HD45.

All models can be supplied with LCD (option **D**).



In the series **HD46 ...**, versions with relay outputs are available with display and keyboard (option **DT**)

The following table lists the available models:

Model	RH	T	CO ₂	Analog output	RS485 output	Relay output	LCD	LED
HD45 17V	✓	✓		✓ (2 outputs)				Power
HD45 17A	✓	✓		✓ (2 outputs)				Power
HD45 17S	✓	✓			✓			Power
HD45 17R	✓	✓				✓ (1 output)		Power
HD45 17SR	✓	✓			✓	✓ (1 output)		Power
HD45 17VR	✓	✓		✓ (2 outputs)		✓ (1 output)		Power
HD45 17AR	✓	✓		✓ (2 outputs)		✓ (1 output)		Power
HD45 17DV	✓	✓		✓ (2 outputs)			✓	Power
HD45 17DA	✓	✓		✓ (2 outputs)			✓	Power
HD45 17DS	✓	✓			✓		✓	Power
HD45 17DR	✓	✓				✓ (1 output)	✓	Power
HD45 17DSR	✓	✓			✓	✓ (1 output)	✓	Power
HD45 17DVR	✓	✓		✓ (2 outputs)		✓ (1 output)	✓	Power
HD45 17DAR	✓	✓		✓ (2 outputs)		✓ (1 output)	✓	Power
HD45 7BV		✓	✓	✓ (2 outputs)				Power
HD45 7BA		✓	✓	✓ (2 outputs)				Power
HD45 7BS		✓	✓		✓			Power
HD45 7BR		✓	✓			✓ (1 output)		Power
HD45 7BSR		✓	✓		✓	✓ (1 output)		Power
HD45 7BVR		✓	✓	✓ (2 outputs)		✓ (1 output)		Power
HD45 7BAR		✓	✓	✓ (2 outputs)		✓ (1 output)		Power
HD45 7BDV		✓	✓	✓ (2 outputs)			✓	Power
HD45 7BDA		✓	✓	✓ (2 outputs)			✓	Power
HD45 7BDS		✓	✓		✓		✓	Power
HD45 7BDR		✓	✓			✓ (1 output)	✓	Power
HD45 7BDSR		✓	✓		✓	✓ (1 output)	✓	Power
HD45 7BDVR		✓	✓	✓ (2 outputs)		✓ (1 output)	✓	Power
HD45 7BDAR		✓	✓	✓ (2 outputs)		✓ (1 output)	✓	Power
HD45 BV			✓	✓ (1 output)				Power
HD45 BA			✓	✓ (1 output)				Power
HD45 BS			✓		✓			Power
HD45 BR			✓			✓ (1 output)		Power
HD45 BSR			✓		✓	✓ (1 output)		Power
HD45 BVR			✓	✓ (1 output)		✓ (1 output)		4 LED CO₂ level
HD45 BAR			✓	✓ (1 output)		✓ (1 output)		4 LED CO₂ level
HD45 BDV			✓	✓ (1 output)			✓	Power
HD45 BDA			✓	✓ (1 output)			✓	Power
HD45 BDS			✓		✓		✓	Power
HD45 BDR			✓			✓ (1 output)	✓	Power
HD45 BDSR			✓		✓	✓ (1 output)	✓	Power
HD45 BDVR			✓	✓ (1 output)		✓ (1 output)	✓	Power
HD45 BDAR			✓	✓ (1 output)		✓ (1 output)	✓	Power

Model	RH	T	CO ₂	Analog output	RS485 output	Relay output	LCD keyboard	LED
HD46 17V	✓	✓		✓ (2 outputs)				Power
HD46 17A	✓	✓		✓ (2 outputs)				Power
HD46 17S	✓	✓			✓			Power
HD46 17R	✓	✓				✓ (2 outputs)		Power RH + T
HD46 17SR	✓	✓			✓	✓ (2 outputs)		Power RH + T
HD46 17DV	✓	✓		✓ (2 outputs)			only LCD	Power
HD46 17DA	✓	✓		✓ (2 outputs)			only LCD	Power
HD46 17DS	✓	✓			✓		only LCD	Power
HD46 17DTR	✓	✓				✓ (2 outputs)	✓	Power RH + T
HD46 17DTSR	✓	✓			✓	✓ (2 outputs)	✓	Power RH+ T
HD46 17BV	✓	✓	✓	✓ (3 outputs)				Power
HD46 17BA	✓	✓	✓	✓ (3 outputs)				Power
HD46 17BS	✓	✓	✓		✓			Power
HD46 17BR	✓	✓	✓			✓ (3 outputs)		Power RH+T+ CO ₂
HD46 17BSR	✓	✓	✓		✓	✓ (3 outputs)		Power RH +T+ CO ₂
HD46 17BDV	✓	✓	✓	✓ (3 outputs)			solo LCD	Power
HD46 17BDA	✓	✓	✓	✓ (3 outputs)			solo LCD	Power
HD46 17BDS	✓	✓	✓		✓		solo LCD	Power
HD46 17BDTR	✓	✓	✓			✓ (3 outputs)	✓	Power RH +T+ CO ₂
HD46 17BDTSR	✓	✓	✓		✓	✓ (3 outputs)	✓	Power RH +T+ CO ₂

Ordering codes

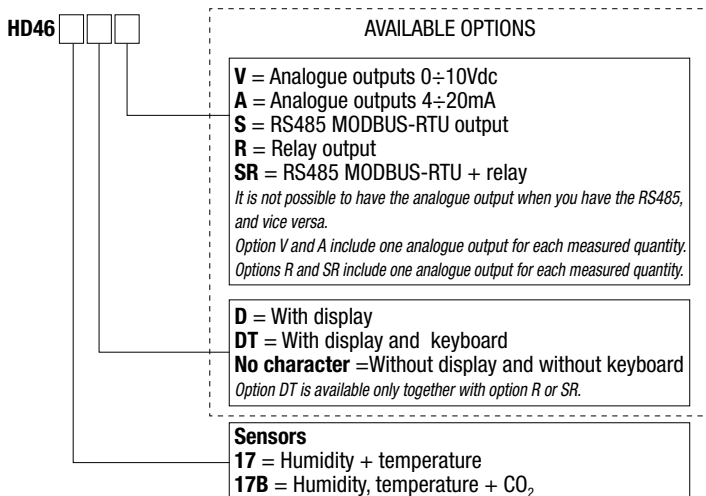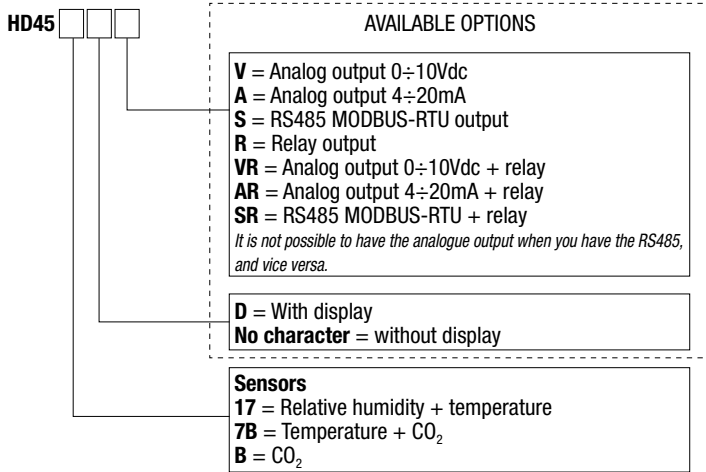

Examples of ordering codes

- HD45 7BDVR:** Transmitter, indicator and regulator for temperature and CO₂, two analogue outputs 0÷10V, one configurable relay to control temperature or CO₂.
- HD45 BVR:** Transmitter, indicator and regulator for CO₂. Without display, with LED indicators of the CO₂ level, with analogue output 0÷10V, with relay.
- HD45 17AR:** Transmitter and regulator for humidity and temperature. Without display, with two analogue outputs 4÷20mA, one configurable relay to control the humidity or temperature.
- HD45 17DV:** Transmitter and indicator for humidity and temperature. With display, two analogue outputs 0÷10V, without relay.
- HD45 7BSR:** Transmitter and regulator for temperature and CO₂. Without display, with RS485 output, no analogue output, with one configurable relay to control temperature or CO₂.
- HD46 17BDV:** Transmitter and indicator for humidity, temperature and CO₂. With display, without keyboard, with three analogue outputs 0÷10V, without relays and without RS485.
- HD46 17BDTSR:** Transmitter, indicator and regulator for humidity, temperature and CO₂. Display and keyboard, three relay outputs, RS485 output.
- HD46 17S:** Humidity and temperature transmitter. No display and no keyboard, no relays, with RS485 output.

Accessories

- DeltaLog14:** Software for connecting to the PC via the serial output, for the configuration of the instrument and data download. For Windows® operating systems.
- HDM46:** Calibrated humidity and temperature replacement module (only for models HD46...)
- RS45:** **Not isolated** serial connection cable with built-in adapter. USB connector for PC and mini-USB connector for the serial port of the instrument. The cable powers the instrument.
- RS45I:** **Isolated** serial connection cable with built-in adapter. USB connector for PC and mini-USB connector for the serial port of the instrument. The cable does not power the instrument.
- HD45TCAL:** The Kit includes the **RS45** cable with built-in adapter and the CD-ROM with the **DeltaLog14** software for Windows operating systems. The cable is provided with USB connector on the PC side and mini-USB connector for the serial port of the instrument.
- HD45TCALI:** The Kit includes the **RS45I** cable with built-in adapter and the CD-ROM with the **DeltaLog14** software for Windows operating systems. The cable is provided with USB connector on the PC side and mini-USB connector for the serial port of the instrument.

Manufacture of portable and bench top scientific instruments
Current loop and voltage output transmitters and regulators
Temperature - Humidity, Dew point - Pressure - CO₂
Air speed - Light - Optical Radiation - Acoustics - Vibration
pH - Conductivity - Dissolved Oxygen - Turbidity
Elements for weather stations - Thermal Microclimate



LAT N° 124 Signatory of EA, IAF and ILAC Mutual Recognition Agreements
Temperature - Humidity - Pressure - Air speed
Photometry/Radiometry - Acoustics

CE CONFORMITY

- **Safety:** EN61000-4-2, EN61010-1 Level 3
- **Electrostatic discharge:** EN61000-4-2 Level 3
- **Electric fast transients:** EN61000-4-4 Level 3, EN61000-4-5 Level 3
- **Voltage variations:** EN61000-4-11
- **Electromagnetic interference susceptibility:** IEC1000-4-3
- **Electromagnetic interference emission:** EN55022 class B

